arXiv:1208.1126v2 [physics.ed-ph] 29 Oct 2012

An undergraduate study of harmonic and parametric motion of a simple spring–mass system from motion waveforms

I. Boscolo, F. Castelli and M. Stellato
Dipartimento di Fisica, Universitá degli Studi di Milano and
Istituto Nazionale di Fisica Nucleare – Sezione di Milano, via Celoria 16, 20133, Italy

(Dated: October 30, 2012)

Abstract

A popular experiment of the undergraduate physics laboratory is the study of a mass attached to a spring oscillating vertically. This experiment in its most general form, exhibits complex dynamics due to the simultaneous action of gravitational, elastic and torsional forces. In addition the friction of the air against the mass introduces further difficulties in the study of the dynamics. The objective of the article is to present a didactic method to study harmonic and non-harmonic motion in the spring-mass experiment in a comprehensive but still manageable level. The system is at first approximated as an harmonic oscillator. Significant deviations from the simple harmonic motion model are described and discussed. In particular this includes the observed parametric oscillation behavior. The study of the parametric behavior is done via the analysis of the motion waveforms.

I. INTRODUCTION

An experiment featuring a mass attached to a spring is a popular experiment worldwide. In many instances it is the basic experiment used to introduce first year physics students to the study of harmonic oscillations. This indeed was the case in our first year physics undergraduate course[1]. A key advantage of this experiment is that the apparatus is simple and relatively inexpensive. A downside, however, is the number of papers indicating that this experiment is not simple at all[2–8].

Gravitational (pendulum), elastic (spring) and torsional forces[2,3,5,8] generates numerous and complex physical phenomena in the motion of the spring-mass system. Examples are: multimode operation[8], parametric instability and energy transfer between the spring-bouncing mode and the pendular-swinging mode. A real spring-mass system behaves as a simple harmonic oscillator–as treated in textbooks–only in the specific conditions: (i) the mass of the spring is negligible with respect to the attached mass, (ii) the system oscillates far from resonance, that is the ratio between the spring ω_k and pendulum ω_p mode frequencies is far from 2, (iii) the system featuring a spring with an exact axial stretching. In general the spring-mass behavior in a laboratory environment opened to many possible choices turns out very complex to study. In fact, it behaves as a parametric oscillator rather than an harmonic oscillator. This is due to the fact that the spring and pendulum motions are non-linearly coupled. In this case the oscillation becomes unstable when the frequencies of the two modes are resonant[2,3], i.e. $\omega_k/\omega_p = 2$.

We believe that a comprehensive experimental treatment of the general spring-mass system is needed. This is mainly due to the nature of the laboratory environment where students tend to operate the system in a variety of possible configurations. The main punch line of the paper is to show that the study can be analyzed via the motion waveforms obtained with a set of different masses. Different masses induce a variation of both the spring and the pendulum angular frequency (via the pendulum length variation) and thus of the frequency ratio

$$\frac{\omega_k}{\omega_p} = \frac{\sqrt{k/m}}{\sqrt{g/\ell_0}}\,, \tag{1}$$

where k is the spring constant, m is the appended mass, ℓ_0 is the rest spring length and g is the gravity acceleration constant. A suitable change of the masses allow to span all the behaviors from below resonance to beyond resonance.

In running the experiment, students have to face the gap between theory and practice, have to look at a complex multi-effect motion, have to master experimental techniques, have to treat data statistically and, possibly, have to purge the experiment from the the many "nuisances" (with the help of a guide). They are forced to develop the ability to manage unexpected experimental observations. The complexity of a real behavior requires a strategy for singling out the motion components, relaxing their interrelations so to treat separately the phenomena and, afterwards, to set the complete picture. In short, the work on this experiment turns out to be a research (guided) activity. The physics content of a parametric behavior must be approached and the basics must be enlighten.

The theoretical work starts from the textbook idealized motion equation

$$\frac{d^2\, z(t)}{dt^2} + \frac{C}{m}\frac{d\, z(t)}{dt} + \frac{k}{m}\,\left(z(t) - \ell_0\right) = g\,. \tag{2}$$

The experimental goal is to test the solution

$$z(t) = z_o e^{-\gamma\, t}\, sin(\omega\, t) \tag{3}$$

where

$$\omega^2 = \frac{k}{m} - \left(\frac{C}{2\,m}\right)^2 = \omega_k^2\, - \gamma^2\,. \tag{4}$$

In these equations, $\gamma = C/2m$ is the damping constant and C is the friction coefficient. The damping time is $\tau = 1/\gamma$. In the above equations, the gravitational force mg is opposed to the equilibrium spring force $k\ell_0$ (hence $-k\ell_0 + mg = 0$) and sets the rest position $z(0)$. The mass of the spring is assumed zero, while it is not at all. Friction is assumed proportional to the velocity, while air resistance depends on the object shape and, in fact, it is not linear with velocity. The investigation proceeds trough the following steps: (a) test of the Hooke's $|F| = |k\,\Delta z|$ law; (b) test of $\omega^2 = k/m$ law; (c) measure of the damping time τ and (d) test of the sinusoidal solution of Eq. (3).

Here we present the study of the free spring-mass oscillations. A complete investigation of the spring-mass system requires also the study of the forced oscillations[1]. This study is meant as a deeper grounding for those conducting a widely used experiment and a possible topic for undergraduate students in open ended investigations or small individual research projects.

II. THE SETUP

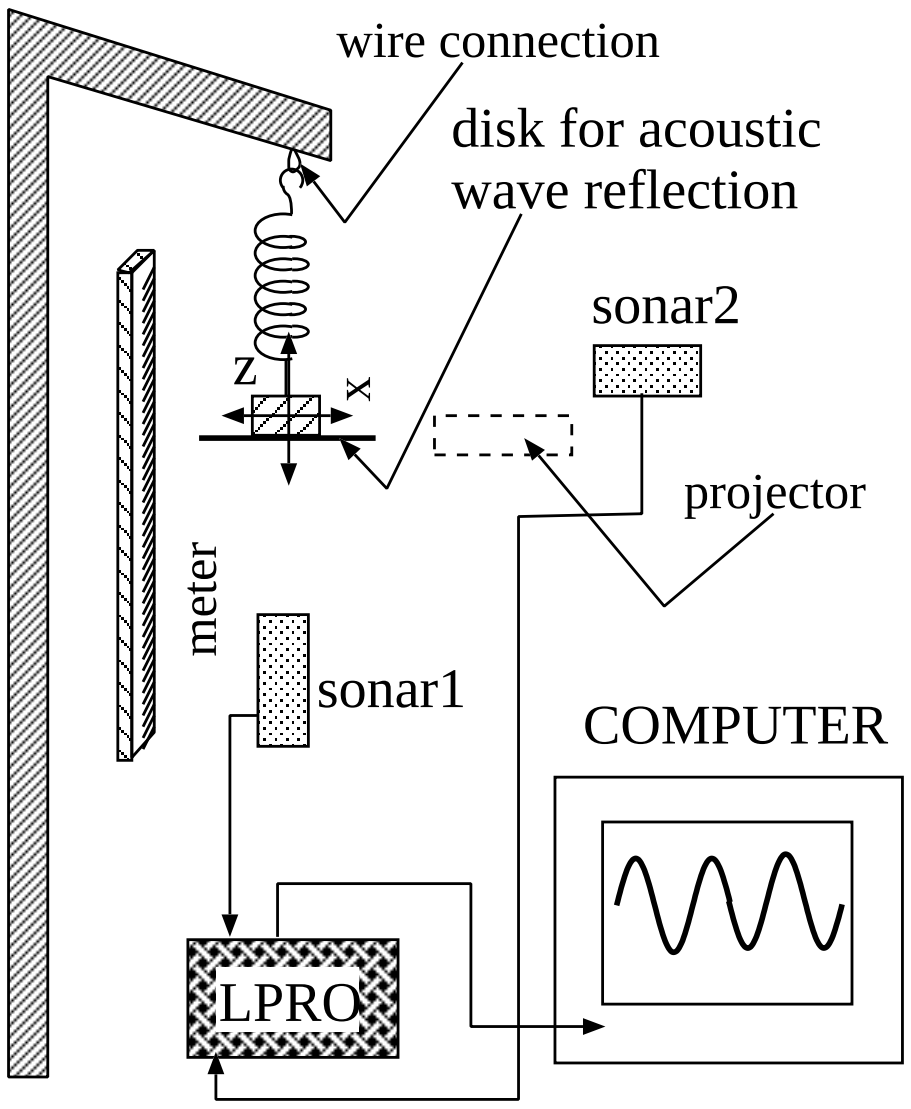

FIG. 1: Layout scheme: a meter and light projector are used for measuring the spring extension, the sonars detect the motion, the digital data acquisition tool LPRO - a Vernier Loggerpro- acquires and sends the coordinates $z(t)$, $x(t)$ to the computer. The top arm is bent for avoiding back reflection of the sonar signal.

The apparatus has been kept as simple as possible, just a spring and a weight oscillating vertically as shown in Fig. 1. The pivot is done by a short piece of wire. Sonar1 and sonar2 detect $z(t)$ and $x(t)$ coordinates. The system is surrounded by plastic foam to absorb the direct sonar waves not reflected by the mass-blob. This is a pile of 20 g metal disks on a support, to which we added as much plasticine as necessary to obtain precise values of total weight. The mass moves around in a almost random way owing to a mass wobble motion and the spring transverse oscillations (with wide pendular and/or vertical oscillations). Because of these spurious motions, at the base, the support holds a diskette of 70 mm diameter to reflect efficiently enough the sound waves sent by the bottom sonar. The diskette diameter value is a compromise between a larger value required for ideal sonar detection and the smallest possible one required to minimize wobble motion. Spurious motions are kept under control by carefully stretching the spring along its vertical axis or, alternatively, shifting the mass sideways. The resulting waveforms are therefore as simple as possible. A generic system motion is a composition of the two spring and pendulum oscillations plus the mass

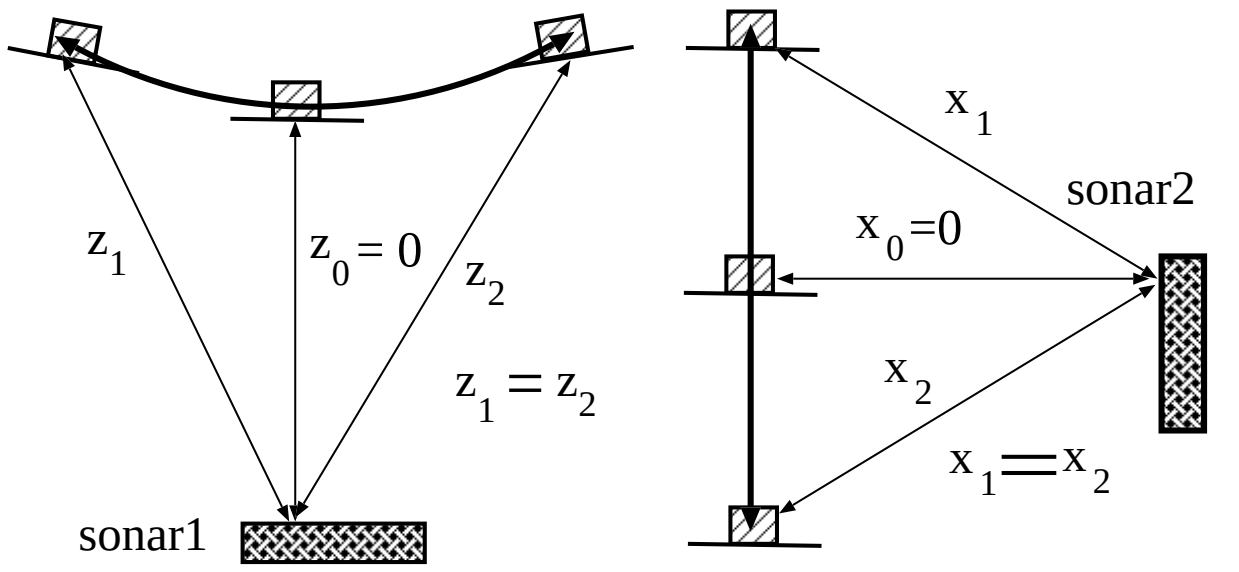

FIG. 2: Scheme of the sound waves paths to and fro sonars-masses. Sonars are suited to follow the in front movements. A side movement is detected as a length difference between the initial and actual sonar-mass distance, the side movement is seen as a kind of projection of the initial sonar-object line along the actual sonar-object line. Sonar1 detection is indifferent to the plane of pendulum oscillation, the inverse happens for sonar2.

wobbling. The bottom and side sonars detect the composite motion, see Fig. 2. The bottom sonar sees the transverse (pendulum) motion with a very reduced amplitude (its projection onto the z axis) and the converse happens for the second sonar. The distortion introduced into one motion by the other motion was tested by forcing the system into a pure motion. Just for this test, the pendulum motion was obtained appending the mass at a wire, the vertical motion was forced inserting a thin metal stick vertically inside the spring.

We will see below that the pendulum oscillation plane is not stable. This fact does not affect the detection by sonar1, whereas it makes sonar2 useless when the angle variation is large, but still helpful when the angle variation is small. The motion analysis is based mainly on data from sonar1.

Typical mass and spring constant values were $m_{spring} \simeq 4.8$ g, $k \simeq 8$ N/m. The following effective masses were appended: 40, 45, 50, 55, 60, 70, 80 g. The effective mass is the sum of the appended mass and 1/3rd of the spring mass[1,4,8,11], as explained below. In fact, this experiment also requires the consideration of the non-negligible mass of the spring.

III. TEST OF THE HOOKE'S AND $\omega^2 = k/m$ LAWS

Hooke's law $|F| = |k\,\Delta z|$ test was performed by appending a set of different masses and measuring the spring elongations with a meter. The spring constant value was found with a precision of 0.1 percent.

The $\omega^2 = k/m$ law test was done appending a set of different masses and measuring the period T by a chronometer. Masses range from a top value limited by the spring damage and a bottom value determined by excessive vibrations. The goal was to verify the above relation transformed into

$$m = \frac{k}{4\,\pi^2} \cdot T^2 \,. \tag{5}$$

The graph of the mass versus T^2 showed the expected straight line, but with a negative intercept at the y-axis, see Fig. 3. This test posed "dramatically" the problem of the nonnegligible mass of the spring. The class discussion about the physics law[1] led to conclude that the spring mass had to be considered and the equation was rewritten as

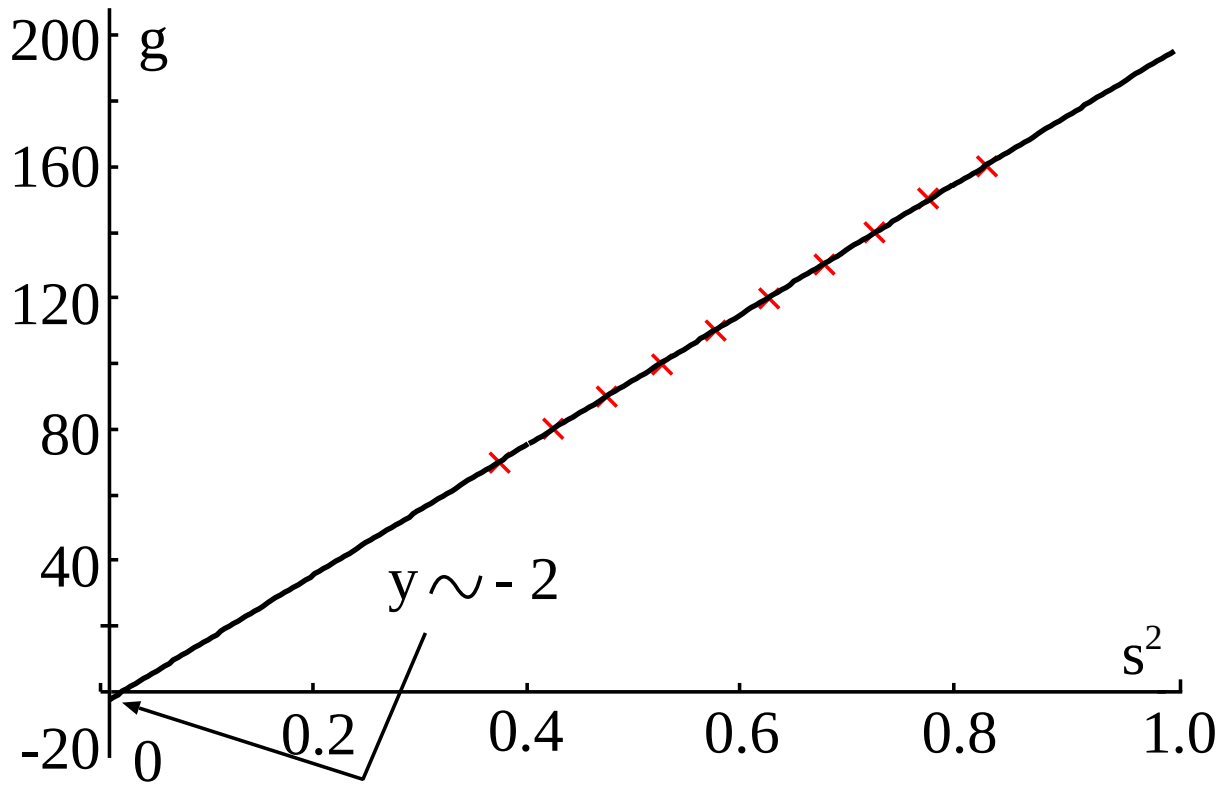

FIG. 3: Graph of eq. 5 showing the negative intercept at the y axis.

$$m = \frac{k}{4\,\pi^2} \cdot T^2 - m_0 \,. \tag{6}$$

The intercept gave the expected value of a third of the spring mass to be added to the dynamic system[4,11] $m_0 = (1/3)\, m_{spring}$. In doing the above test, students noted that the lighter the masses the more irregular the oscillation motion and the more scattered the results. They realized that the system did not show the expected simple harmonic oscillation and posed questions. The new physics of the parametric oscillation made its first apparition in our undergraduate Lab.

An estimate of the decay time τ is done measuring with the chronometer the time at $1/e$ oscillation amplitude reduction. Different masses produced different τ as expected from the equation $\tau = 2m/C$.

IV. MEASUREMENTS ON HARMONIC AND PARAMETRIC MOTION

After the above tests we passed to the motion analysis using the motion waveforms. Students had to test motion Eq. (2) via the analysis of the detected waveform fixed at the computer screen. They operated with different object masses following their own project. Typical waveforms obtained with the set of 70 g, 60 g, 50 g and 40 g masses are shown in Fig. 4. Waveforms show that the spring-mass system has a substantial vertical harmonic oscillation mode with relatively heavy masses, but two modes with light masses. The presence of the two modes modulate the envelope. The direct observation of the motion shows that in certain configurations (i.e. proper ratio between the spring–bouncing and the pendular

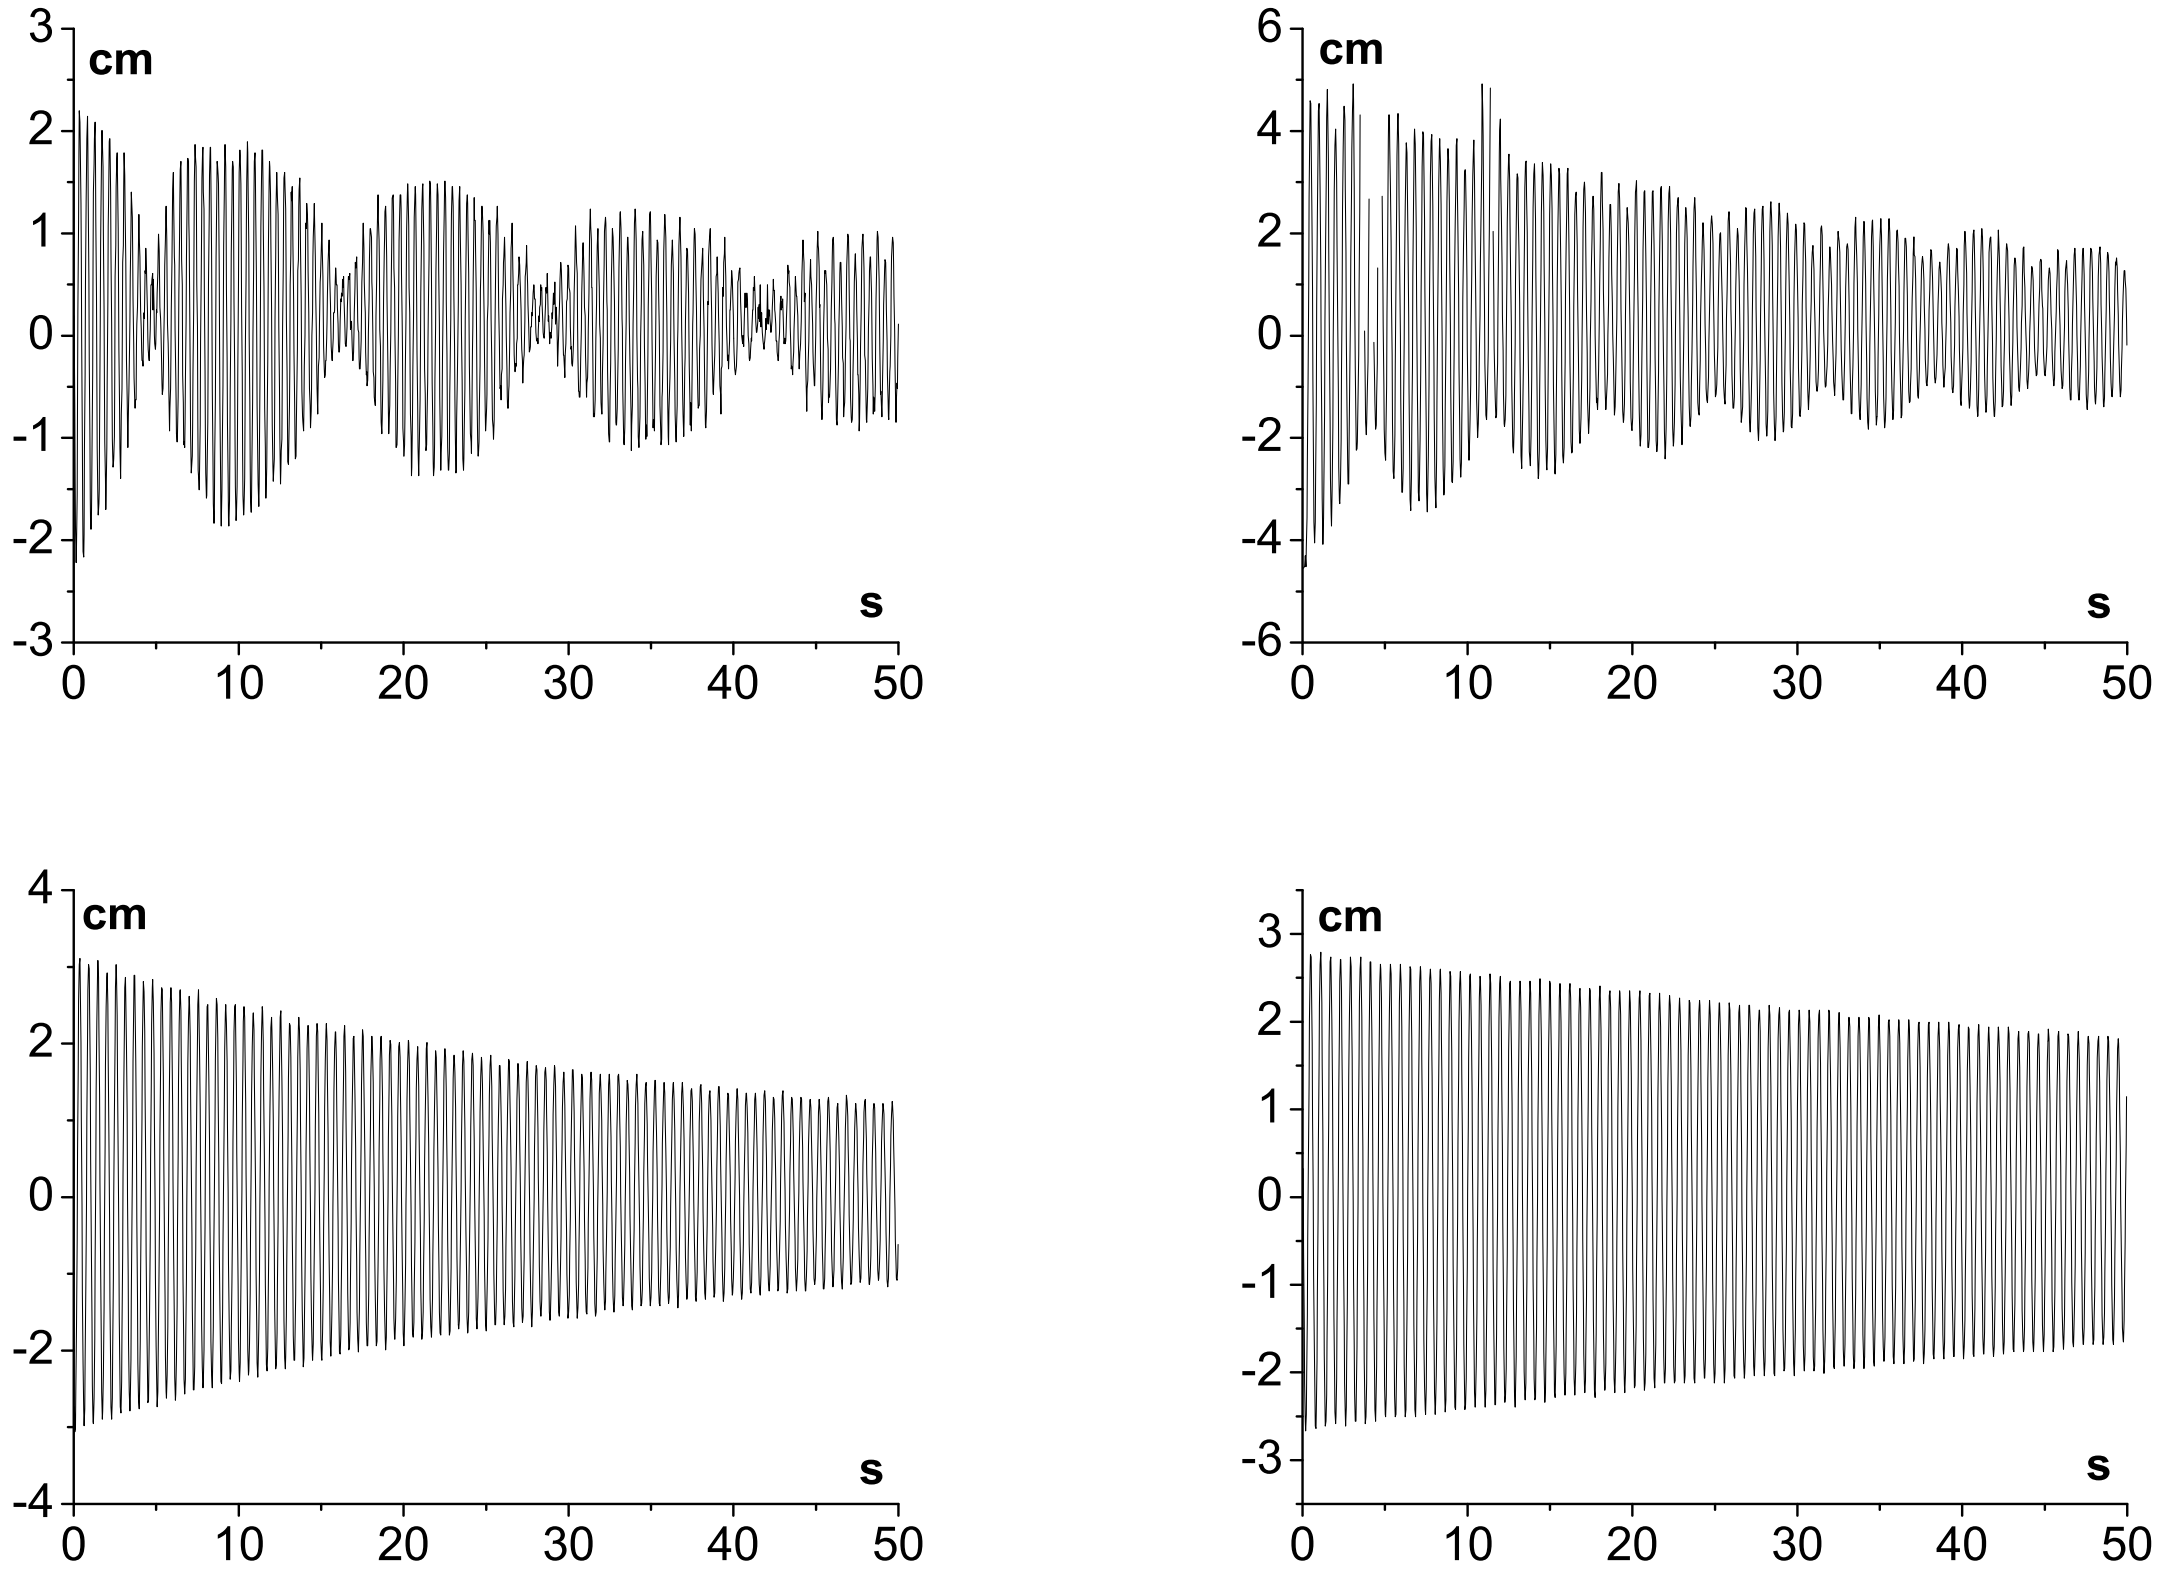

FIG. 4: Waveforms from top to bottom refer to 40 g, 50 g, 60 g and 70 g masses. The system passes from near resonance, with 40 g mass $\omega_k/\omega_p \simeq 2.04$, to out of resonance, with 70 g mass $\omega_k/\omega_p \simeq 1.67$. The waveforms evolve from complete modulation to classical damped sine-wave. The comb-like crests along the signal envelope, evident in the first signal, are generated by the peculiar detection of the transverse motion by sonar1.

frequencies) the vertical motion disrupts in few cycles. The plane of the pendular oscillation changes in an apparently random manner.

The harmonic and non-harmonic behaviors refer to different physical phenomena. Fig. 5 clearly shows the coupling between the two spring and pendulum oscillations. It shows also that resonance between the two motions occurs when the ratio between two motion periods T_k (spring) and T_p (pendulum) is 1/2. In the pendular-swinging motion the stretching force applied by the mass to the spring causes a double oscillation in a single period of the pendular motion. This force oscillation makes the "rest spring length" to oscillate about its initial rest value ℓ_0

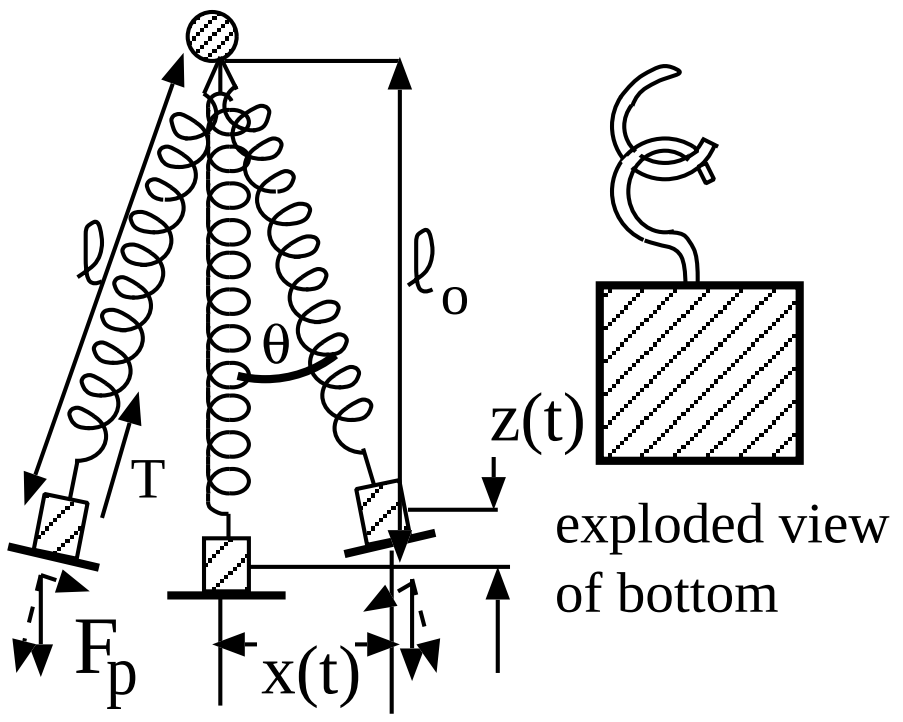

FIG. 5: Sketch of the applied force with coupling between spring–bouncing and pendular–swinging motions. Note that the mass does not align with the spring axis.

$$\ell_0(t) = \ell_0 + \delta\ell(t). \tag{7}$$

The coupling between the pendular and spring oscillations induces a parametric instability between the two modes[2,3,9,10] when the resonance condition is met. The degree of instability and the mode energy transfer depend on the angular frequency ratio of Eq. (1). This is easy to check by exciting the pendulum motion with a lateral displacement. One sees that vertical spring oscillations are generated at the expense of the pendulum motion. The converse happens with an initial vertical stretching. Fig. 6 shows the induced vertical signal.

In literature, equations describing nonlinear coupled pendulum and spring oscillations are given as[2]

$$\frac{d^2\, x(t)}{dt^2} + \omega_p^2\, x(t) = c\, x(t)\, z(t) \tag{8}$$

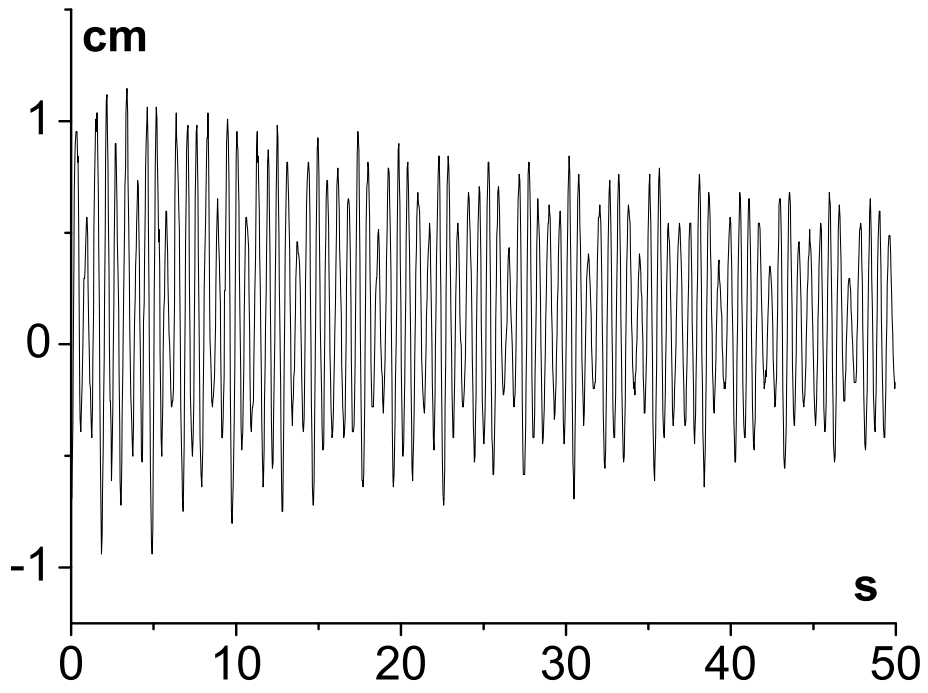

FIG. 6: This waveform of the vertical oscillation comes from the energy transfer from a pendulum oscillation carefully started by a lateral initial displacement. The "fuzzy" shape of the waveform depends on the simultaneous presence of vertical and transverse oscillations, as seen by sonar1. A 70 g mass was used in this test.

$$\frac{d^2\, z(t)}{dt^2} + \omega_k^2\, z(t) = c\, \frac{x^2(t)}{2}\,, \tag{9}$$

where the coupling constant c is a function of the system parameters[2]. The way to obtain these equation is through the Lagrangian formulation in which friction force terms are not considered. This system can be solved in a particular case analytically[2] and in the general case numerically[3]. The onset of the parametric instability with a complete conversion between the two oscillations occurs when the resonance condition is met.

Modulated waveforms, in which there is only partial energy transfer between modes, were observed up to values of the ratio ω_k/ω_p around 1.8. We suggest that the presence of the disk with its wobble oscillation might produce a widening of the resonance condition for the mode exchange. These observations are supported by the analysis of the frequency spectrum given by the waveform FFT (Fast Fourier Transform), shown in the frames of Fig. 7. In each frame, the largely dominant line is that of the ω_k oscillation. Other lines correspond to pendular motion; due to the peculiar detection of the transverse motion by sonar1 (see Fig. 2) the relative second harmonic frequencies are particularly evident. The spring and the pendulum frequencies resulted shifted of a couple of centimes of Hz, as foreseen by theory[2]. We checked that the very small lines at high frequencies are due to the disk wobble vibrations.

Incidentally, students had to measure the frequency from the waveforms as a basic test of Eq. (4). In that connection the concept of frequency spectrum and the use of a FFT tool, giving immediately the frequency, was introduced.

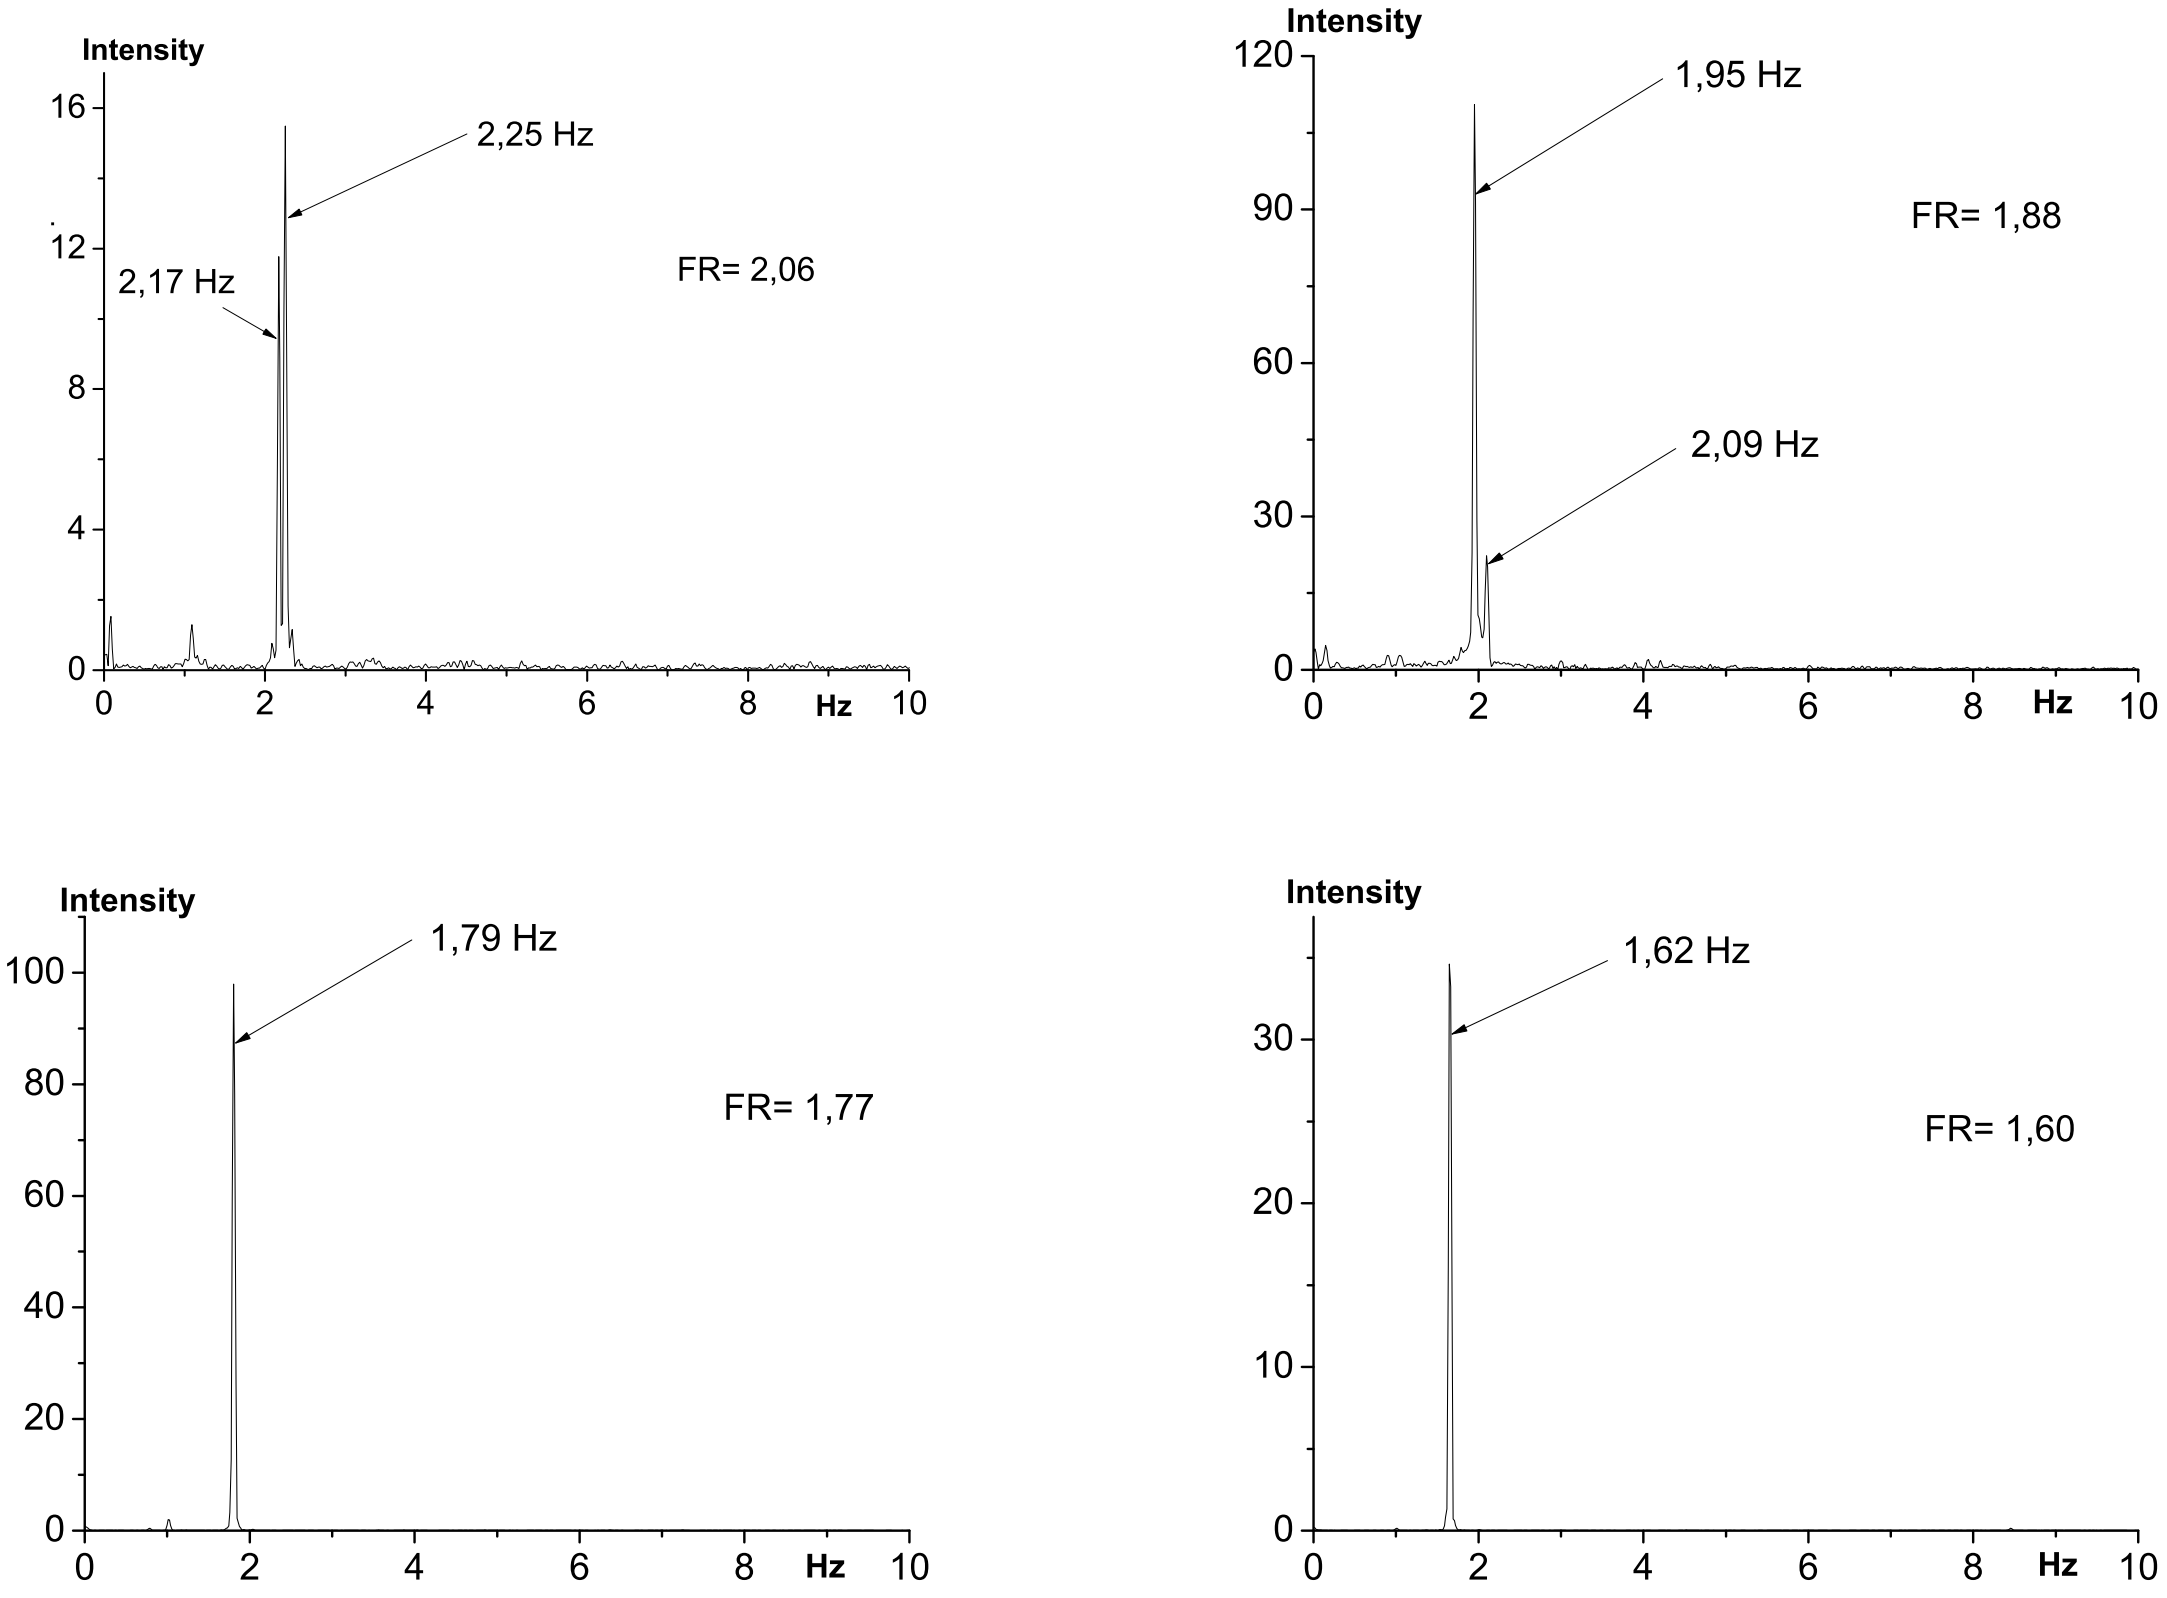

FIG. 7: FFT signals derived from 40g, 50g, 60g and 70g waveforms. FR is the actual value of the frequency ratio. The frequencies of some evident spectrum lines are indicated. The neater the waveform the neater the FFT.

Modulated waveforms were observed with relatively heavy masses in the case of mixed (vertical and transverse) excitation as, for example, that presented in Fig. 8. The setting of an initial $x(0) \neq 0$ causes the onset of the exchange between the two modes, as predicted by the coupling term in the right hand side of Eqs. (8) and (9). In this case, after few oscillation cycles, the system sets itself in the peculiar stable motion shown in Fig. 9, described also in ref[2]. The FFT spectrum shows many relatively intense lines, as in the second frame of Fig. 8. They are generated parametrically by the nonlinear coupling between the two fundamental oscillation modes.

General considerations on the parametric observed behavior are reported below.

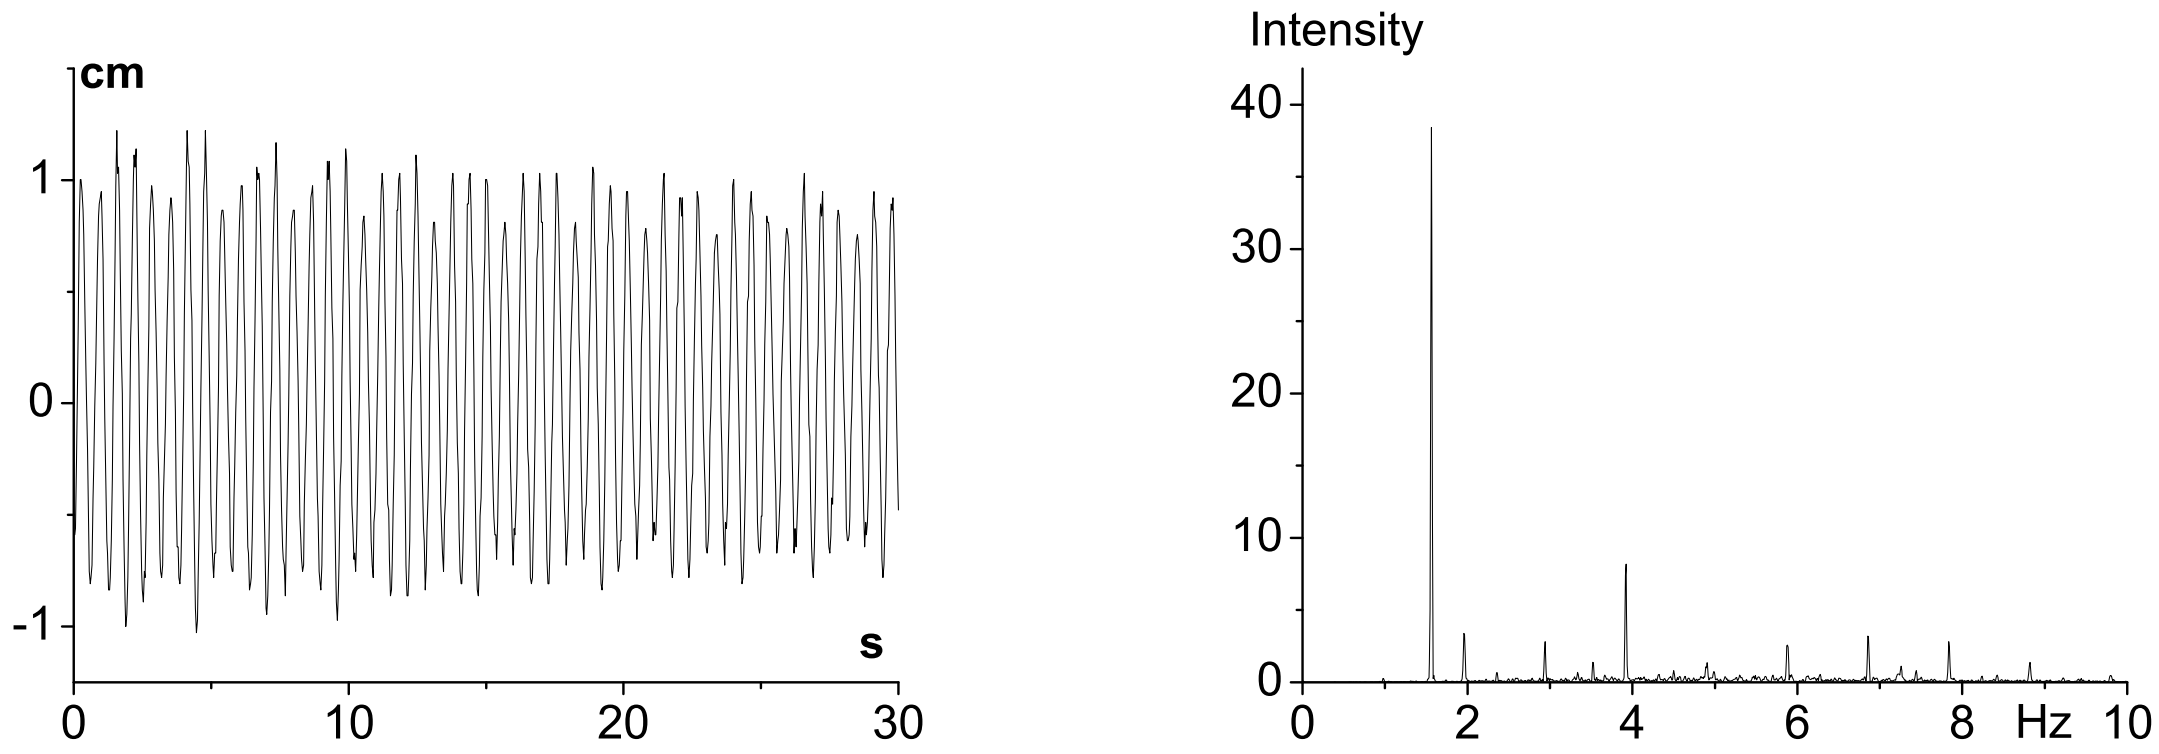

FIG. 8: This waveform was obtained with 80g mass, ratio $\omega_k/\omega_p \simeq 1.63$, and small diagonal displacement. The exchange between the two modes was visibly clear. The frequency spectrum, second frame, shows many lines besides the spring frequency at 1.55 Hz and the very small pendular frequency at 0.95 Hz. Two of these lines correspond to second harmonics of pendulum and spring frequency, respectively. Other evident lines at higher frequency correspond to wobble motions.

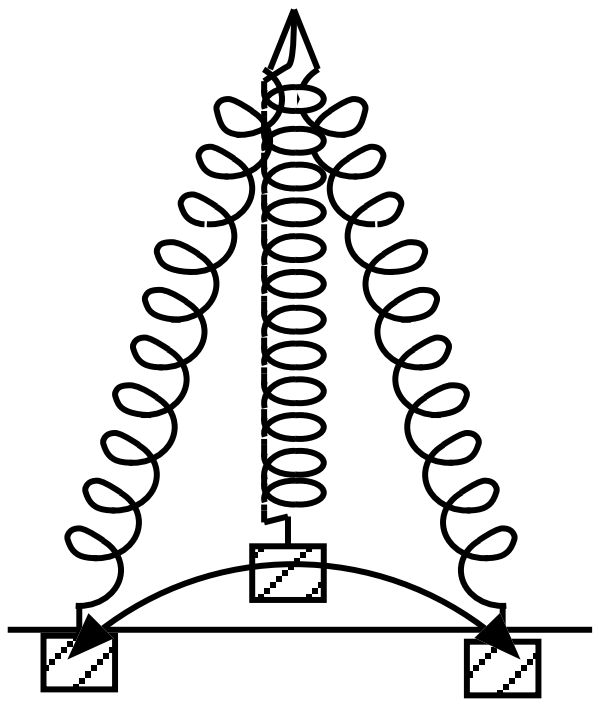

FIG. 9: Motion figure normally assumed by masses heavier than 60g.

- Both strong vertical and lateral mass displacements lead to substantially similar results in terms of waveforms and spectra. This is not the case with small displacement: the lateral one moves both the pendular and the vertical force, the vertical displacement does not switch the pendulum force.

- The mixed excitation produces complete energy transfer between the two modes also at $\omega_k = 1.8\,\omega_p$. The spectra are neater than in pure vertical excitation.

- The pendulum oscillation plane changes at each mode exchange.

A. The connection with the optics

About the parametric behavior of our system, it is worthwhile reporting that the parametric instability is extensively exploited in optics to produce and amplify laser waves at any requested frequency[12,13]. A pump wave ω_1 launched across a non-linear crystal generates a signal wave ω_2 together with an idler wave ω_i. The condition that must be satisfied is

$$\omega_1 = \omega_2 + \omega_i \tag{10}$$

In our spring-mass system the spectrum shows clearly the so-called idler frequency ω_i

$$\omega_i = \omega_k - \omega_p. \tag{11}$$

In many tests, this oscillation appears very small so it must be searched in the spectrum at a known position. As an example, the idler frequency line obtained with a mixed excitations is shown in Fig. 10.

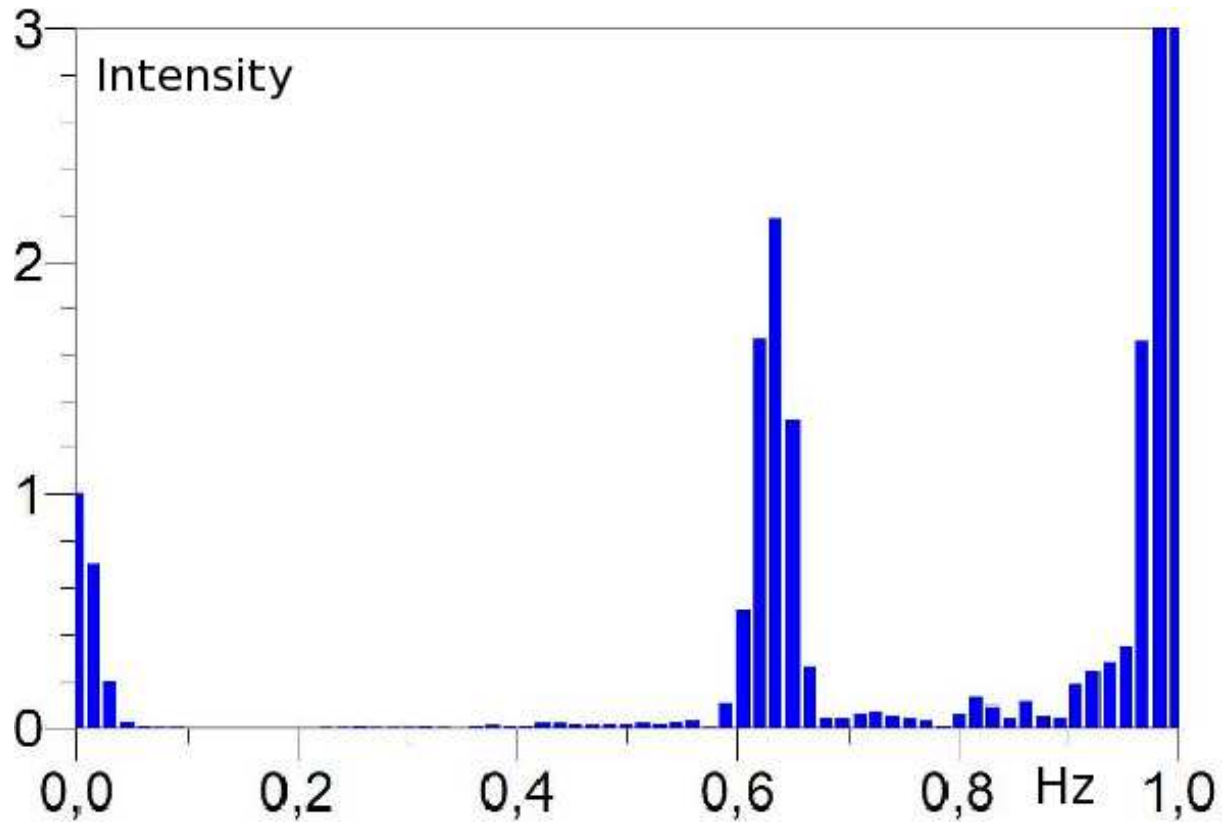

FIG. 10: The idler frequency line at $0.63 = (1.64 - 1.01)$ Hz from the FFT graph of the waveform generated by vertical excitation with an effective mass of 70 g and recorded by sonar2. The same result was obtained with the transverse (pendular) excitation.

V. MEASUREMENT OF THE DECAY TIME τ FROM WAVEFORMS

Following the program on the study of harmonic oscillation, the waveforms far enough from resonance were analyzed. Students obtained a value for τ from the displayed waveform by measuring the time from the start to $1/e$ of the initial amplitude. The decay time resulted much longer than the value previously quoted by direct measurement. Moreover, the oscillation persisted for a very long time at the tail. The waveform should fit the theoretical solution of Eq. (2) which is the mathematical function $f(t) = a(0) \cdot exp(-t/\tau) \cdot sin(\omega_0 + \phi) + b$ by substituting $a(0), \tau, \nu$ obtained in the initial direct measurement. The fit turns out to be impossible. Reasonably good fits between the theoretical curve and the waveform are obtained within sections of the decaying waveform. As an example we report the results obtained with 70 g mass. The fit using the first 10 s curve gives $\tau \sim 12$ s, the fit in the range $\Delta t = 0 - 20$ s gives $\tau \sim 17$ s, the fit in the range $\Delta t = 10 - 30$ s gives $\tau \sim 20$ s, the FIT in the range $\Delta t = 20 - 60$ s gives $\tau \sim 30$ s. The oscillation frequencies varied in the different curve sections in agreement with the τ variation: longer τ , higher frequency. Moreover, the stronger the excitation, the shorter the measured τ in the first curve section. The persistence of the oscillation exceeded 100 s. The fitting curves showed a tail amplitude thinner than the recorded waveform.

To account for these observations, we will consider the energy exchange between the vertical and horizontal modes. The decay of the oscillation waveform detected by the bottom sonar has two ingredients: one is the energy transfer to the pendulum mode, the second is the lower friction at lower oscillation amplitude. The initial fast decay might reasonably be due to the energy transfer, while the slow decay at the tail is simply due to the strong reduction of the air friction with a slow-moving disk (at that point there is no exchange between the two oscillations).

The model for friction $\gamma \dot{x} = (C/m)\dot{x}$ states that the decay time τ is proportional to the appended mass. Measurements result in agreement with that assumption at an extent better than 80 percent[1].

VI. CONCLUSION

The dynamics of a generic spring-mass system moving vertically is equivalent to that of a parametric oscillator with energy exchange between the spring-bouncing and pendular-swinging oscillation. The spring-mass physics system used in a first year laboratory course for the investigation of harmonic oscillations has to be carefully designed in order to reproduce the characteristics of the idealized system treated in textbooks. In particular, the system has to be far from resonance and must feature an exact axial spring stretching.

The study of experiments constrained along a narrow pre-defined path has a poor didactic content. It limits the thinking of the student as a scientist: developing a model and testing it. Instead, for a student to grow, it is paramount to investigate physical phenomena in open environments. We believe that the spring-mass experiment should be approached in class as an harmonic oscillator. However the laboratory environment should be left unstructured granting freedom to the students to build their own system by choosing spring types and different masses. This approach will be an effective teaching tool exposing the students to the dense physics contents of the parametric behavior of the spring-mass system.

The investigation of the motion of the spring-mass experiment via the analysis of the motion waveforms has the potential to enlighten many physics phenomena present in that system: motion instability, mode transfers, resonance, the passage from parametric to harmonic oscillation, the friction variation with oscillation amplitude.

The main contribution of this paper is to show that the spring-mass experiment is manageable and well within the reach of the curriculum of a first year physics course using the waveform detection and its analysis. The complexity and the gap between the ideal theoretical case and the real case makes this experiment a very useful tool to stimulate the thinking process of an aspiring physicist.

VII. ACKNOWLEDGEMENTS

We thank M. Giliberti and R. Lowenstein for supporting this research and for some useful hints. We recognize the technical support by D. Cipriani.

---

[1] I. Boscolo and R. Lowenstein, *The spring-mass experiment as a step from oscillations to waves: mass and friction issues and their approaches*, Lat. Am. J. Phys. Educ. **5**, 409-417, (2011).

[2] M. G. Olsson. *Why does a mass on a spring sometime misbehave?*, Am. J. Phys. **44**, 1211-1212 (1976).

[3] Thomas E. Cayton, *The laboratory spring-mass oscillator: an example of parametric instability*, Am. J. Phys. **45**, 723-732, (1977).

[4] J. Christensen, *An improved calculation of the mass for the resonant spring pendulum*, Am. J. Phys. **72**, 818-828 (2004).

[5] R. Geballe, *Statics and dynamics of a helical spring*, Am. J. Phys. **26**, 287-290, (1958).

[6] E. E. Galloni and M. Kohen, *Influence of the mass of the spring on its static and dynamic effects*, Am. J. Phys. **47**, 1076-78, (1979).

[7] H. L. Armstrong *The oscillating spring and weight-an experiment often misinterpreted*, Am. J. Phys. **37**, 447-449, (1969).

[8] J. T. Cushing, *The spring-mass system revisited*, Am. J. Phys. **52**, 925-932, (1984).

[9] H. M. Lai, *On the recurrence of a resonant spring pendulum*, Am. J. Phys. **52**, 219-223, (1984).

[10] D. E. Holzwarth and J. Malone, *Pendulum period versus hanging-spring period*, Phys. Teach., **38**, 47, (2000).

[11] D. Halliday, R. Resnick and K. S. Krane *Physics, volume 1*, 5th ed. (John Wiley & Sons, 2002, New York, 2002).

[12] A. Yariv, *Quantum Electronics* 3nd ed., (John Wiley & Sons, New York, 1988) p. 411.

[13] S. Cialdi et. al. *Efficient two-step Positronium laser excitation to Rydberg levels*, Nucl. Instr. Meth. Phys. Res. **269**, 1527-1533, (2011).